


Downproofness EN 12132

Data sheet n°	Fabric code	Fiber composition	Filling

TYPE OF TEST		RESULTS						METHOD
Down proof properties of fabrics - Rubbing test	N°							EN 12132-1
Intersection hole between warp and weft Measurement	µm							Internal method
Holes distribution	N°							Internal method
<i>of which covered with resins or other</i>	N°							
Permeability to air	mm/s							ISO 9237 Pressure 250 Pa
	l/min x cm ²							
	ft ³ /ft ² /min							
Seam slippage @ 2,5 mm	Warp Kg							ISO 13936-1
	Weft Kg							

Intersection hole between warp and weft (photo)

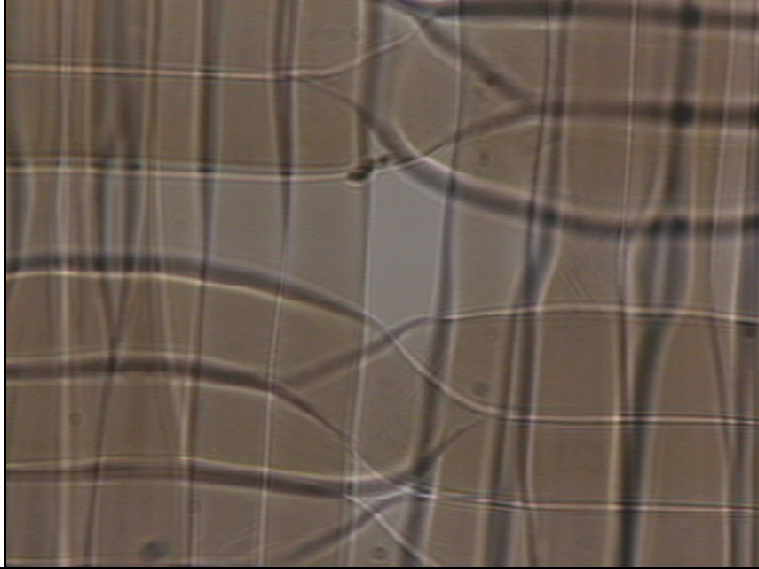

Holes distribution (photo)

